


6 x 19 & 6 x 37 Classification

Rope Diameter		Approx. Weight (lb./ft.)		Nominal Strength*,tons (bright or drawn galvanized**)		
				EEIPS		EIPS
Inches	MM	Fiber Core	IWRC	IWRC	Fiber Core	IWRC
1/4	6.5	0.105	0.116	3.74	3.02	3.4
5/16	8	0.164	0.18	5.8	4.69	5.27
3/8	9.5	0.236	0.26	8.3	6.71	7.55
7/16	11	0.32	0.35	11.2	9.09	10.2
1/2	13	0.42	0.46	14.6	11.8	13.3
9/16	14.5	0.53	0.59	18.5	14.9	16.8
5/8	16	0.60	0.72	22.7	18.3	20.6
3/4	19	0.95	1.04	32.4	26.2	29.4
7/8	22	1.29	1.42	43.8	35.4	39.8
1	26	1.68	1.85	56.9	46.0	51.7
1-1/8	29	2.13	2.34	71.5	57.9	65
1-1/4	32	2.63	2.89	87.9	71.0	79.9
1-3/8	35	3.18	3.5	106	85.4	96
1-1/2	38	3.78	4.16	125	101.0	114
1-5/8	42	4.44	4.88	146	118.0	132
1-3/4	45	5.15	5.67	169	136.0	153
1-7/8	48	5.91	6.5	192	155.0	174
2	52	6.72	7.39	217	176.0	198
2-1/8	54	7.59	8.35	243	197.0	221
2-1/4	58	8.51	9.36	272	220.0	247
2-3/8	60	9.48	10.4	301	244.0	274
2-1/2	64	10.5	11.6	332	269.0	302
2-3/4	70	12.7	14	397	321.0	361

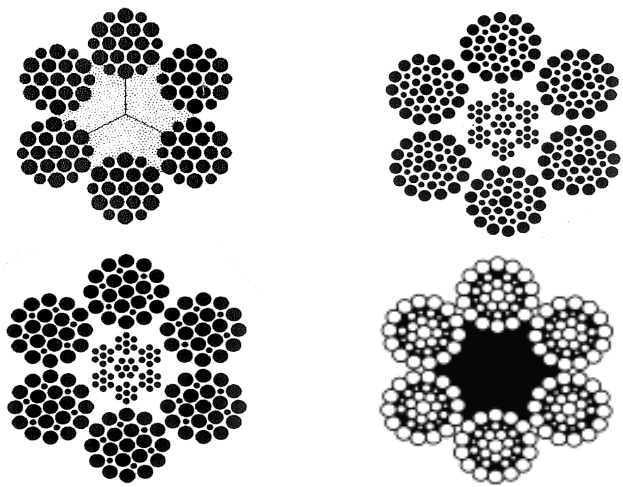

6 x 19

6 x 37

(NOTE*) Tons = Acceptance strength is not less than 2-1/2% below the normal strengths listed. Tons of 2,000 lbs.

(NOTE**) Galvanizing = For class A galvanizing wire rope (EIP grade only), deduct 10% from the nominal strength shown.